


Ceiling Mount presenter **HV-C1000XG**

SPECIFICATIONS

MODEL			HV-C1000XG
Camera	Image pick-up device		1/3" progressive scan CCD
	Total pixels		1,077 (H) x 788 (V) , 850,000 pixels
	Effective pixels		1,034(H) x 779 (V)
	Frame rate		20 frames / sec.
	Resolution Analog RGB output		600(H)x600(V) TV lines
	VIDEO output		400(H) TV lines
Optics	Zooming		Powered (with double speed function) 12x Optical, 2x Digital
	Lens		F2.6~2.7 f=14.2~170mm (12x Zoom Lens)
	Shooting area at 2m distance		Max.648x492mm(25.5"x 19.4"), Min.54x41mm(2.1"x1.6")
	Limit of focus adjustment		Distance from the unit to the text (object of shooting) : 1.3m~∞
	Focusing		Auto / Manual (Powered)
	Iris		Auto(with level adjustment) /Manual
Function	White balance		Full-auto / One-push / Manual
	Nega / Posi conversion		Provided
	Color / B&W selection		Provided
	Aperture selection		Provided
	Pause mode		Provided
	Digital magnification		2x (Can be scrolled)
	Gamma adjustment		Provided (1.0/0.9/0.8/0.7/0.6/0.5/0.4/0.3)
	Image rotation		Provided (0°/90°/180°/270°)
	Arrow video pointer		Provided
	Preset / Move		Provided
	Text mode (contrast)		Provided
	F.A.M. (Frame Accumulate Mode)		Provided
	Sync.system		Internal
Input / Output	Output terminal	RGB output	MINI DSUB 15P connector, female x1
		Composite video output	RCA pin jack / 75Ω unbalanced (NTSC / PAL) x1
		S-video output	MINI DIN 4P connector / 75Ω unbalanced (NTSC / PAL) x1
	Analog RGB output		0.7V (P-P) 75Ω unbalanced, synchronization signal, positive polarity, signal frequency XGA: 48.363kHz(H), 60.004kHz(V) (1,024x 768 @60Hz) compliant with VESA
PC interface	RS-232C		DSUB 9P connector, male x1
	Mouse		Mini DIN 6P connector, female x1
	USB		Type B receptacle x1
Lighting	Lamp		Halogen lamp 12V50W
Others	Dimensions (W x D x H)		226x226x239mm (8.9"x8.9"x9.4")
	Weight		6.5Kgs(14.3lbs) (main body only)
	Power source		AC100-240V,50/60Hz

PROFILE

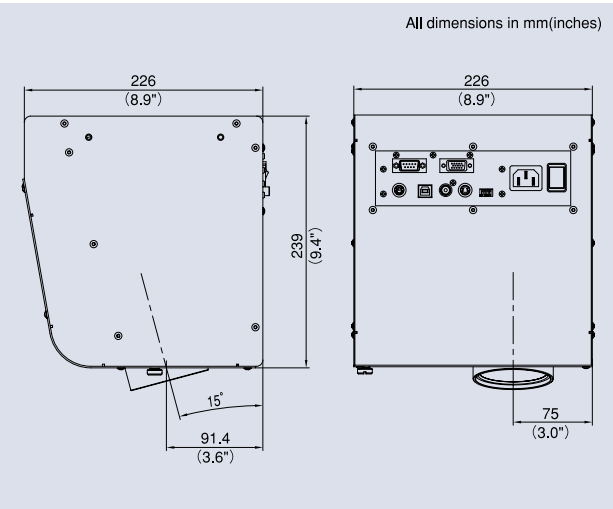

ACCESSORIES

Power cord (2.5m) x1
Video cable (RCA pin connector) (3m) x1
S-video cable (Mini DIN 4P connector) (2m) x1
Infrared wireless remote controller (RCW-C1000) x1
Batteries (Type R03, AAA) x2
Analog RGB cable (DSUB 15P connector) (2m) x1
Analog RGB cable (BNC connector) (1.8m) x1
Instruction manual x1
Installation manual x1
Warranty card x1
Scroll mouse x1
USB cable (1.8m) x1
Utility Software CD-ROM x1
Utility Software Installation manual x1
C. Mounting fitting x1
Attaching screw (M4 x 10) x3
Attaching screw (M5 x 10) x4

NOTE: Design and specifications are subject to change without previous notice.
Dimensions and weight are approximate.
VESA is a registered trademark of Video Electronics Standards Association.
XGA is a trademark or registered trademark of International Business Machines Corporation.

Shooting distance in m (feet)	Shooting area in mm (inches)	
	TELE	WIDE
1.5 m (4.9')	39:30 (1.5" : 1.2")	485:375 (19.1" : 14.8")
2.0 m (6.5')	53:31 (2.1" : 1.2")	662:511 (26.1" : 20.1")
2.5 m (8.1')	67:52 (2.6" : 2.0")	838:648 (33.0" : 25.5")
3.0 m (9.8')	81:63 (3.2" : 2.5")	1015:784 (40.0" : 30.9")
3.5 m (11.4')	96:74 (3.8" : 2.9")	1192:921 (46.9" : 36.3")
4.0 m (13')	110:85 (4.3" : 3.3")	1369:1057 (53.9" : 41.6")



ELMO® ELMO CO., LTD. 6-14, Meizen-cho, Mizuho-ku, Nagoya, 467-8567, Japan
E-Mail:foreign-div@elmo.co.jp

Additional technical information is available from any of the following subsidiary companies;

ELMO Mfg. Corp.

1478 Old Country Road,
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail:elmo@elmousa.com
Web:http://www.elmousa.com

ELMO (Europe) G.m.b.H.

Neanderstr 18,
40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax. 0211-376630
E-mail:elmoeurope@AOL.com
Web:http://www.elmo.de

ELMO Canada Mfg. Corp.

44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail:info@elmocanada.com
Web:http://www.elmocanada.com

ELMO and **ELMO** are registered trademarks of ELMO COMPANY, LIMITED.



This brochure is printed on recycled paper with soy ink.
E04003 Printed in Japan(A)05/2004

ELMO®

NEW PRODUCT

"So Perfect It's Invisible!"

HV-C1000XG

Ceiling Mount Presenter
12xoptical zoom lens + 2xdigital magnification
XGA Progressive Scan CCD

Documents Come in Every Form,
and this XGA Ultra-Telescopic High-Resolution
Presenter handles them All

Space

Open Up Your Vistas

Astonishingly you will now have more free table/desk/podium space. This new unit from ELMO takes you and your associates far beyond the limits of conventional tabletop document cameras.

We've moved the presenter to the ceiling so your workspace is bigger than ever. No more equipment cables trailing across your tabletop/desktop - you can now utilize your new freedom in not only presentations but a wide range of activities.



Conventional design




HV-C1000XG

Compact Design

This new integrated design fits both camera and lighting into a small housing.

Mounted on the ceiling, it views your presentation material (flat-art or 3D objects of architectural drawings) from a 15 degree offset to your desktop or conference table to eliminate annoying reflections while illuminating the subject material clearly.



Shoots from a 15° offset

Clear Field of Vision

With no equipment blocking the line of sight between the presenter and audience, they can all enjoy improved, stress-free communication and achieve greater retention of the material or information displayed on the screen.



Scene1
In the corporate meeting room
Can be used to present a prototype effectively.



Scene2
In the university lecture room...
If a whiteboard is erected in the area covered by the camera, the system can be used not only for photographing paper and 3D objects, but also to easily capture anything written on the whiteboard with a water-based magic marker.

Speakers can proceed with their presentations with more freedom than ever before, without having to return to the blackboard.



Scene3
In the courtroom...
It's perfect for presenting material evidences.



Scene4
At the TV station...
Newscasters can display their manuscripts in a monitor located next to the camera, keeping the news program flowing smoothly.



Scene5
The City Council Chamber...
Council members can view site-maps and blueprints concerning a proposed new shopping center that will require a zoning variance as it is to be located in a residential area.

All members of the community can view the data on a projected display and vote to approve or disapprove the variance.

Installs Almost Anywhere

The compact, lightweight design can be installed almost anywhere easily, thanks to its small size and ease of installation.



Quality

High Quality

Using an 850,000-pixel progressive scan CCD, the HV-C1000XG can deliver high-definition images at XGA resolution (1,024 x 768 pixels).

Our proprietary ELMO image-processing engine (E.I.P.E.) suppresses noise as well as false color artifacts on image profiles when converting the CCD signal to digital, providing accurate color reproduction with a rich and varied range of color.



New image-processing engine



HV-C1000XG



Conventional design

Utility


Image Enlargement and Scrolling

Enlarge the parts you really want to emphasize with a 2x zoom, and freely scroll the picture horizontally, vertically or even diagonally from anywhere in the room, council chamber or lecture Hall.



Ultra-large Imagery at up to 24x Size


For example, at a photographic distance of two meters, you can deliver the same crisp imagery for originals from A2 size down to business cards, and all with one-touch auto-focus. The digital magnification delivers another 2x zoom, expanding the range to a truly amazing 24x at your fingertips: the power to handle almost anything.

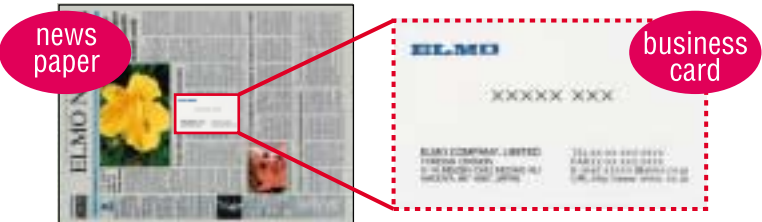

With a newly-developed high-performance ultra-telescopic 21x power zoom lens, you can show crystal-clear close-ups of tiny objects.

F.A.M. (Frame Accumulate Mode) for Super High-definition Still-Image Capture

Most documents are viewed in a still-image mode. By accumulating several images of the same document digitally in a fraction of a second, the F.A.M. (Frame Accumulate Mode) instantly reduces any artifacts or roughness within the image due to random noise that occurs in traditional document cameras from other suppliers.

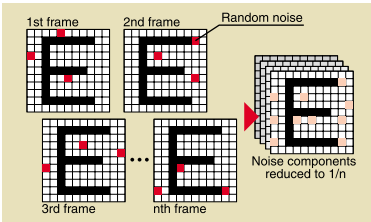

F.A.M. on



F.A.M. off

Image Memory

You can save up to eight images in internal memory. This lets you create smooth-flowing presentations by calling up pre-saved materials.

This image memory function can speed-up meetings lectures and council events dramatically. (Turning the presenter off deletes what is in memory.)



Moving-picture Support

Image capture at 20 frames per second means smooth, easy-to-follow presentations of hand motions or activities, too.



At 20 fps



At 15 fps

Other Convenient Features

Freeze (Pause)	Aperture Selection	Preset/ Move
Text mode (Contrast)	Color/ B&W selection	Versatile Interfaces
Arrow video pointer	Nega/ Posi Conversion	Computer Connection Kit As Standard Equipment
Gamma Adjustment (8 Levels)	White Balance (Auto/ One-Push/ Manual)	Image Rotation
	On-Screen Display (OSD)	Diverse Control Options