



* Camera not included

A versatile dome for ELMO pan & tilt cameras

This lightweight pendant dome kit is furnished with an upper ABS black dome and a removable lower acrylic dome that can be ordered clear or smoked. The dome kit includes one bracket to fix the camera. The dome is furnished with a 1" x 6" long nipple and a flange for ceiling installation. Wall installation requires the **EWB-1610** mount.

Fabrication:

Upper Dome: Black ABS

Lower Dome: Removable, clear, smoked,

1/8" acrylic dome

Weight: 3 lb (1.37 kg)

External Dimensions:

Height 8.75" (222 mm) Width: 10.5" (267 mm) Length 10.5" (267 mm)

Options:

ELB-110C: Pendant dome with clear lower dome **ELB-110S****: Pendant dome with smoked lower dome


** When using a smoked dome the quality of the image may be altered.
This dome should only be used in good lighting conditions.


Accessories:


EWB-1610: Wall mounting bracket

ELB-110C ELB-110S

Indoor Dome Housing for ELMO PTC-200 & PTC-201C IP PTZ cameras

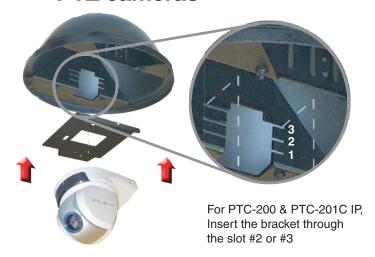





ELMO Mfg. Corp. 1478 Old Country Road, Plainview, NY 11803-5034

Tel.: (516) 501-1400 Fax: (516) 501-0429